


600

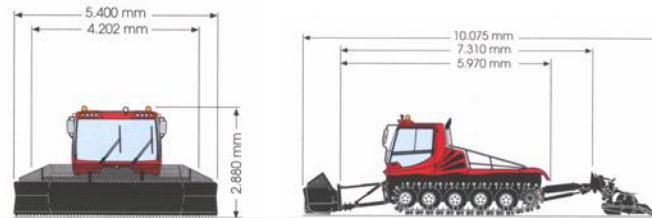

Dimensions			Engine		
Width without tracks	2,500 mm	98.5 in	Type	Mercedes Benz OM 460 LA	
Over combi tracks	4,200 mm	165 in	Cylinders	6	
Over steel tracks	3,900 mm	154 in	Displacement	12,800 cc	781 in ³
Across Multiflex tiller	5,400 mm	213 in	Output acc. to ECE	400 hp (295 kW)	400 hp
			Maximum torque	1,900 Nm @ 1,300 rpm	1,400 ft lb
Overall height	2,880 mm	113 in	Fuel consumption	from 20 liters/hr	5.3 gal/hr
Height with cab tilted	3,360 mm	132 in	Fuel tank capacity	220 liter	58 gallons
Ground clearance	350 mm	14 in			
Rear deck	2250 x 1920 mm	88.5 x 76 in	Transmission		
Length with All-Way blade and tiller	10,075 mm	33 ft	Type	Rexroth hydrostatic	
			Steering	Electronic, semi-circular steering wheel	
Weight			Brakes	Hydrostatic, dynamic feedback	
Tare weight with combi tracks	7,100 kg	15,650 lbs		Two multi-disk parking brakes	
Tare weight with steel tracks	7,300 kg	16,100 lbs			
			Electrical		
Payload on rear deck	1,500 kg	3,300 lbs	Voltage	24 volt	
Performance data			Alternator	28 V / 140 A	
Speed, continuously variable	0-23 km/h	0-14 mph	Batteries	2 x 12 V / 135 Ah	
Ground pressure w/ combi tracks	0.051 kg/cm ²	0.725 psi	Cold start rating	600 A	
Ground pressure w/ steel tracks	0.053 kg/cm ²	0.75 psi			
Grooming capacity per hour	96,000 m ² /hr	23.75 acres	Attachments		
	(with tiller)		Front:	All-way blade, Rotary snow blower, SnowCutter, PipeMagician	
			Rear:	MultiFlex tiller, Compactor bar, Vario bar, 4 or 8 man personnel cabs	